



EdgePoint™

Intelligent WISP Control Point with FiberProtect™

Models: EP-R6, EP-R8, EP-S16

Weatherproof Enclosure for Outdoor Use

Powerful Routing or Switching Features

Fiber Backhaul Capability





Overview

Ubiquiti Networks introduces the EdgePoint™, part of the EdgeMAX® platform. The first application-specific designed WISP control point, the EdgePoint combines EdgeMAX routing features with fiber backhaul and versatile powering capabilities.

The EdgePoint is available in three models:

- **EP-R6** Layer-3 router
- **EP-R8** Layer-3 router
- **EP-S16** Layer-2 switch with some layer-3 capabilities

Breakthrough in Tower Deployment

The EdgePoint features FiberProtect to significantly reduce electrostatic discharge (ESD) failures and electromagnetic interference (EMI), greatly improve data signal integrity, and consolidate the wired data backhaul to a single fiber cable run for long-distance connectivity.

All-in-One Design

A single, compact controller efficiently eliminates clutter, expensive cabinets, extraneous installations, and excessive maintenance.

Robust Construction

The ruggedized case withstands outdoor conditions, including wind, rain, and snow. The included cable sleeve protects the cables and cable opening. If you prefer, you can swap it out for your own conduit.

Advanced Applications


For the EP-R6 and EP-R8, powerful routing features – such as load balancing and failover– provide redundancy and increased performance for outdoor wireless links.

For the EP-S16, layer-2 link aggregation provides similar redundancy and increased performance benefits.

Versatile Power Options


Powered by 54VDC or by PoE, the EP-R8 and EP-S16 can support 54 or 24V passive PoE to power all Ubiquiti® products, including airFiber® and airMAX®.

Powered by 24VDC or by PoE, the EP-R6 can support 24V passive PoE to power most Ubiquiti products.

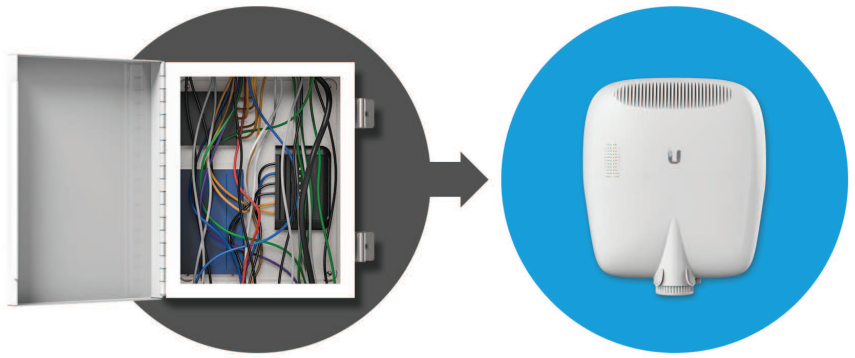

Example of EdgePoint as WISP Control Point

The EdgePoint replaces a cabinet containing a patch panel, power rack, multiple PoE adapters, syslog server, AP (for EdgePoint management), switch, router, and modem.

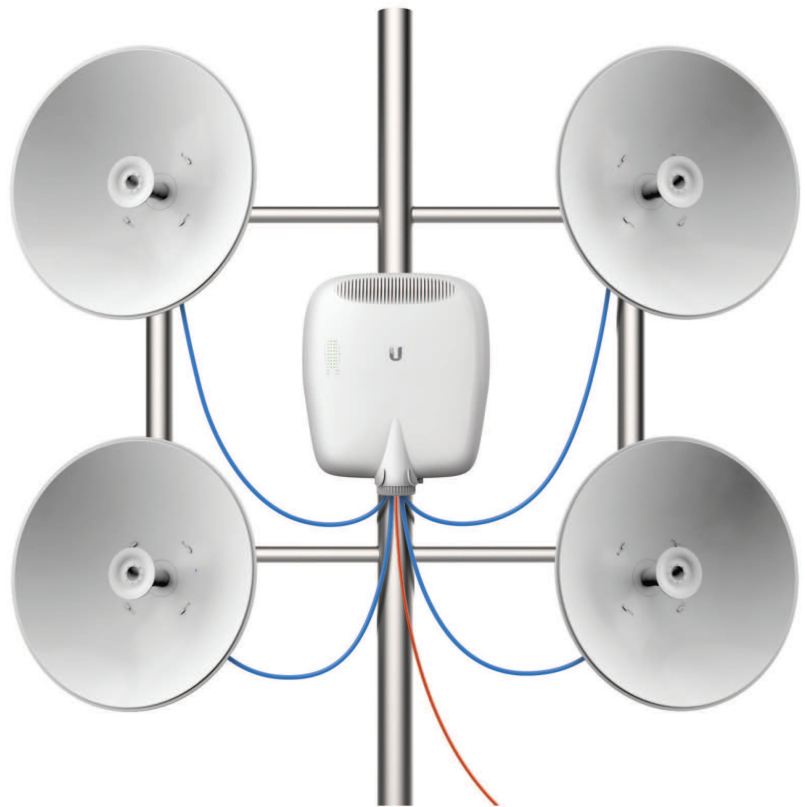

Example of a Backhaul Deployment for the EdgePoint

The EdgePoint runs fiber to the top of the tower so no cabinet is needed and there are no long Ethernet cable runs.

Intuitive User Interface

The EdgePoint features a graphical user interface designed for convenient setup and control. Accessed via a network port and web browser, the user-friendly interface provides intuitive management with a virtual view of the ports, displaying physical connectivity, speed, and status.

Depending on whether you are configuring a router (EP-R6 or EP-R8) or switch (EP-S16), the configuration interface will differ.

Routing Configuration

The EP-R6 or EP-R8 offers robust features, including:

- VLAN interfaces for network segmentation
- Static routes and support of routing protocols: OSPF, RIP, and BGP
- Firewall policies and NAT rules
- Application identification with Deep Packet Inspection (DPI)
- DHCP services
- Quality of Service (QoS)
- Network administration and monitoring tools
- Administrator and operator accounts
- Comprehensive IPv6 support

Switching Configuration


The EP-S16 provides advanced features, including:

- MSTP/RSTP/STP
- VLAN, Private VLAN, Voice VLAN
- Link Aggregation
- DHCP Snooping, IGMP Snooping
- TACACS+, RADIUS, 802.1X, MAC Filtering, ACL
- DiffServ, CoS
- Static Routing, Policy-Based Routing


Configuration by CLI

The CLI provides quick and flexible configuration by command line and features the following:

- For power users, configuration and monitoring of all advanced features
- Direct access to standard Linux tools and shell commands (EP-R6 or EP-R8 only)
- CLI access through the following:
 - Serial console port (EP-R8 or EP-S16 only)
 - SSH
 - Telnet
 - Graphical user interface (EP-R6 or EP-R8 only)

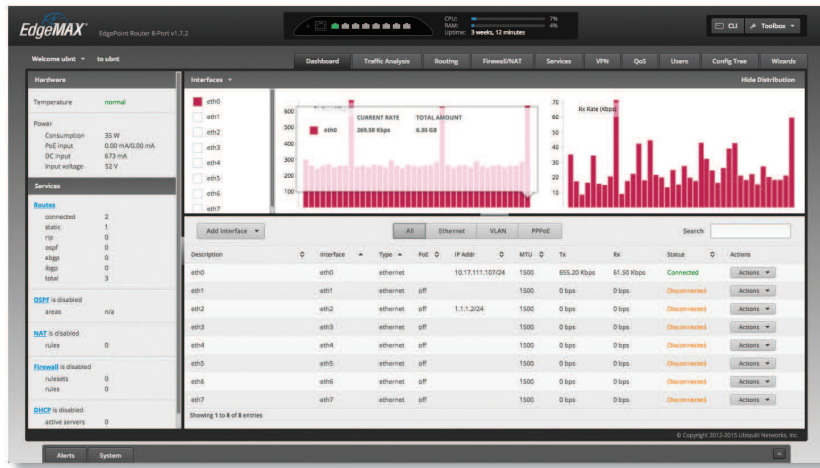

For the EP-R8, the Dashboard screen displays detailed statistics: IP information, MTU, transmit and receive speeds, and status for each interface.

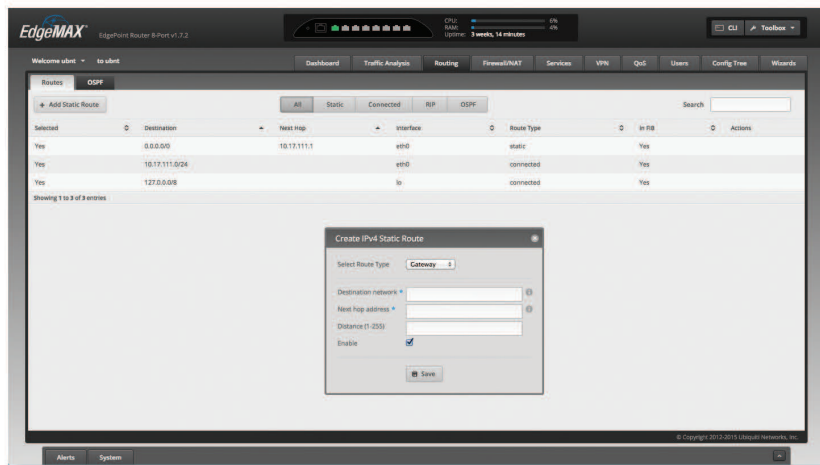

For the EP-R8, the Routing > Routes screen displays static, connected, RIP, and/or OSPF routes. You can add static routes on this screen.

```
CLI
Welcome to EdgeOS
By logging in, accessing, or using the Ubiquiti product, you
acknowledge that you have read and understood the Ubiquiti
license Agreement (available in the Web UI or, by default,
http://192.168.1.1) and agree to be bound by its terms.

ubnt login: ubnt
Password:
Last login: Sun Jun 1 10:08:00 UTC 2014 on pts/0
linux@10.10.10.1:~$ show
Welcome to EdgeOS
linux@10.10.10.1:~$ show
Possible completions:
arp                firewall          login            tech-support
configuration      hardware         ntp              update
conntrack          history          ospf             users
date               host             pppoe-server    version
debugging          ip               reboot          vpn
dshup              interfaces       restore         webproxy
dshup6             ip               shutdown       webproxy
dshup6-pd          ipv6             snmp            wpa
disk               load-balance    system          wpa
file               log              table
firewall           flow-accounting  show            flow-accounting
hardware           show            show system hardware details
history            show            show system history
host               show            show host information
incoming           show            show advanced ipsec-policy information
interfaces         show            show network interface information
ip                 show            show IPv6 routing information
```

An industry-standard command-line interface (CLI) is available for advanced users.

EP-S16

The EP-S16 features 16 RJ45 Ethernet ports and two SFP+ ports.

Bottom Panel


- Power Options
 - 54VDC, 6A Terminal Block
 - Dual PoE Input
- (1) Console Port
- Data Ports
 - (16) RJ45 Ports
 - (2) SFP+ Ports

Sixteen RJ45 ports support PoE:

- PoE Input or Output
 - (2) Ports with Two Options:
 - 54V, 1.5A Passive PoE Input or
 - 54 or 24V, 1.4A Passive PoE Output*
- PoE Output
 - (2) 54 or 24V, 1.4A Passive PoE Output Ports*
 - (12) PoE+ or 24V, 0.7A Passive PoE Output Ports*



EP-S16 Bottom Panel

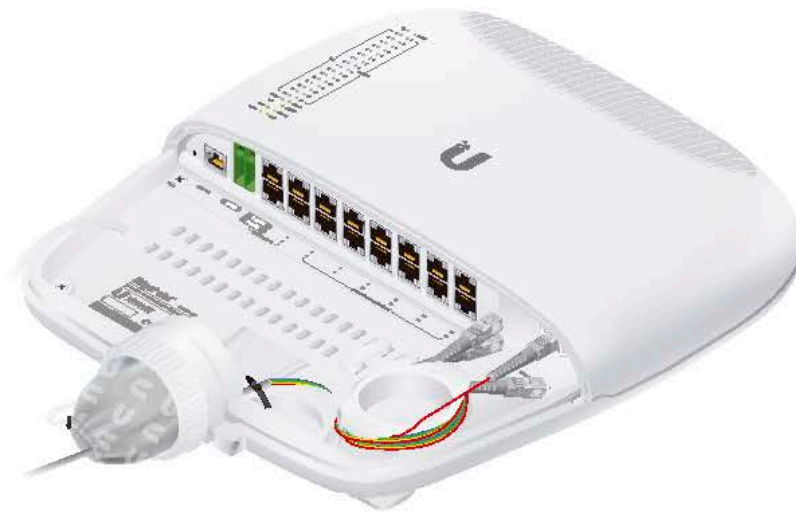


EP-S16 Strain Relief for Fiber Optic Strands

Cabling Protection

- FiberProtect Strain Relief for Fiber Optic Strands
- Cable Sleeve and Option for Conduit (Not Included)
- Cable Tie Slots (Cable Ties Not Included)

Back Panel

- Lanyard Loop for Ease of Installation
- Slot for PicoStationM2HP (Not Included) to Allow for Wireless Management
- Pole-Mount Bracket (Wall-Mount Bracket Also Included)
- Ground Bonding Point

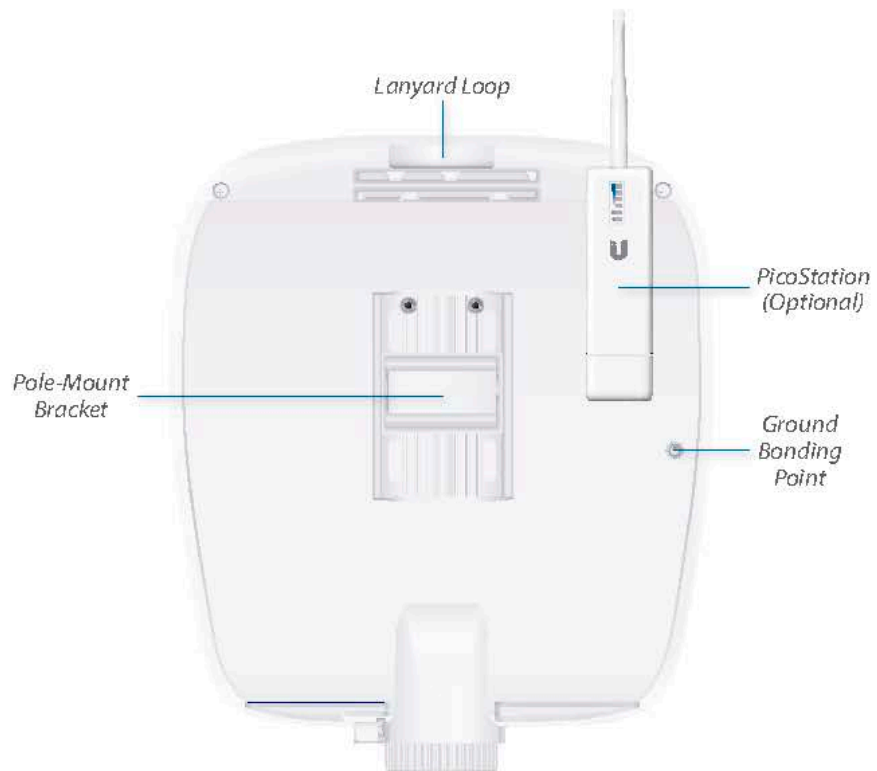

EP-S16 Back Panel

EdgePoint™

Hardware Specifications

EP-S16	
Dimensions	326.6 x 382.7 x 88.8 mm (12.86 x 15.07 x 3.50")
With Wall-Mount	326.6 x 382.7 x 105.5 mm (12.86 x 15.07 x 4.15")
Weight	3.4 kg (7.50 lb)
With Wall-Mount	3.8 kg (8.38 lb)
Enclosure Characteristics	Diecast Aluminum Alloy and Polycarbonate with UV Resistance
Non-Blocking Throughput	36 Gbps
Switching Capacity	72 Gbps
Forwarding Rate	53.57 Mpps
Max. Power Consumption	40W (Excludes PoE Output)
Power Input	(1) DC Terminal Block or (2) RJ45 (Ports 1 and 2) (Self-Correcting Polarity Protection on DC Terminal Block Only, Diode ORed Protection on All Power Inputs)
Power Supply	Min. 54V / 0.8A (Excludes PoE Output Power)
VDC Input	54VDC, 6A
Passive PoE Input	(2) 54V/1.5A, 4-Pair (+1, 2, 4, 5; -3, 6, 7, 8) Passive PoE, Ports 1 and 2 (Do NOT Configure Port 1 or 2 in PoE Output Mode if You Are Using PoE Input Power Sources.)
Passive PoE Output	(4) 54V or 24V /1.4A, 4-Pair (+1, 2, 4, 5; -3, 6, 7, 8) Passive PoE, Ports 1 to 4 (12) 802.3af/at or 24V/0.7A, 2-Pair (+4, 5; -7, 8) Passive PoE, Ports 5 to 16
Power Monitoring	(1) DC Terminal Block, Input Power (2) RJ45, Ports 1 and 2, PoE Input or Output Power (14) RJ45, Ports 3 to 16, PoE Output Power
Supported Voltage Range	56 to 42VDC
Button	Reset
LEDs	
System	Power
1 to 16	Speed/Link/Activity, PoE
SFP	Speed/Link/Activity
Ports	
Serial Console Port	(1) RJ45 Serial Port
Data Ports	(16) 10/100/1000 RJ45 Ports (2) 1/10 Gbps SFP+ Ports
Processor	ARM Cortex-A9 400 MHz
System Memory	256 MB DDR3 RAM
Code Storage	32 MB
Certifications	CE, FCC, IC
Pole/Wall Mount	Yes
Wind Loading	153 N @ 200 km/h (34 lbf @ 125 mph)
Wind Survivability	200 km/h (125 mph)
Operating Temperature	-40 to 65° C (-40 to 149° F)
Operating Humidity	10 to 90% Noncondensing



Switch Software Specifications

Software Information	
Core Switching Features	<ul style="list-style-type: none">• ANSI/TIA-1057: LLDP-Media Endpoint Discovery (MED)• IEEE 802.1 AB: Link Layer Discovery Protocol (LLDP)• IEEE 802.1D: Spanning Tree Compatibility• IEEE 802.1S: Multiple Spanning Tree Compatibility• IEEE 802.1W: Rapid Spanning Tree Compatibility• IEEE 802.1Q: Virtual LANs with Port-Based VLANs• IEEE 802.1p: Ethernet Priority with User Provisioning and Mapping• IEEE 802.1X: Port-Based Authentication with Guest VLAN Support• IEEE 802.3: 10BASE-T• IEEE 802.3u: 100BASE-T• IEEE 802.3ab: 1000BASE-T• IEEE 802.1ak: Virtual Bridged Local Area Networks - Amendment 07: Multiple Registration Protocol• IEEE 802.3ac: VLAN Tagging• IEEE 802.3ad: Link Aggregation• IEEE 802.3x: Flow Control• IEEE 802.1D-2004: Generic Attribute Registration Protocol: Clause 12 (GARP)• IEEE 802.1D-2004: Dynamic L2 Multicast Registration: Clause 10 (GMRP)• IEEE 802.1Q-2003: Dynamic VLAN Registration: Clause 11.2 (GVRP)• RFC 4541: Considerations for Internet Group Management Protocol (IGMP) Snooping Switches• RFC 5171: Unidirectional Link Detection (UDLD) Protocol
Advanced Layer 2 Features	<ul style="list-style-type: none">• Broadcast Storm Recovery• Broadcast/Multicast/Unknown Unicast Storm Recovery• DHCP Snooping• IGMP Snooping Querier• Independent VLAN Learning (IVL) Support• Jumbo Ethernet Frame Support• Port MAC Locking• Port Mirroring• Protected Ports• Static MAC Filtering• TACACS+• Voice VLANs• Unauthenticated VLAN• Internal 802.1X Authentication Server

Software Information	
Platform Specifications	<ul style="list-style-type: none"> • DHCP Server <ul style="list-style-type: none"> • Maximum Number of Pools: 128 • Maximum Number of Leases (Total): 2048 • Routing <ul style="list-style-type: none"> • Number of Routes: 16 • Number of Routing Interfaces: 15 • VLANs: 255 • MAC Addresses: 8k • ARP Cache Size: 493 • MSTP Instances: 4 • LAGs: 6 • ACLs: 100 with 10 Rules per Port • Traffic Classes (Queues): 8
System Facilities	<ul style="list-style-type: none"> • Event and Error Logging Facility • Run-Time and Configuration Download Capability • PING Utility • FTP/TFTP Transfers via IPv4/IPv6 • Malicious Code Detection • BootP and DHCP • RFC 2021: Remote Network Monitoring Management Information Base Version 2 • RFC 2030: Simple Network Time Protocol (SNTP) • RFC 2819: Remote Network Monitoring Management Information Base • RFC 2865: RADIUS Client • RFC 2866: RADIUS Accounting • RFC 2868: RADIUS Attributes for Tunnel Protocol Support • RFC 2869: RADIUS Extensions • RFC 3579: RADIUS Support for EAP • RFC 3580: IEEE 802.1X RADIUS Usage Guidelines • RFC 3164: BSD Syslog Protocol
Management	<ul style="list-style-type: none"> • Web UI • Industry-Standard CLI • IPv6 Management • Password Management • Autoinstall Support for Firmware Images and Configuration Files • SNMP v1, v2, and v3 • SSH 1.5 and 2.0 • SSL 3.0 and TLS 1.0 • Secure Copy (SCP) • Telnet (Multi-Session Support)
Layer 3 Routing	<ul style="list-style-type: none"> • Static Routing • Policy-Based Routing

Software Information

QoS	<ul style="list-style-type: none"> • Access Control Lists (ACLs), Permit/Deny Actions for Inbound IP and Layer 2 Traffic Classification Based on: <ul style="list-style-type: none"> • Time-Based ACL • Source/Destination IP Address • TCP/UDP Source/Destination Port • IP Protocol Type • Type of Service (ToS) or Differentiated Services (DSCP) Field • Source/Destination MAC Address • EtherType • IEEE 802.1p User Priority • VLAN ID • RFC 1858: Security Considerations for IP Fragment Filtering • Optional ACL Rule Attributes <ul style="list-style-type: none"> • Assign Flow to a Specific Class of Service (CoS) Queue • Redirect Matching Traffic Flows • Differentiated Services (DiffServ) <ul style="list-style-type: none"> • Classify Traffic Based on Same Criteria as ACLs • Mark the IP DSCP or Precedence Header Fields, Optional • Police the Flow to a Specific Rate with Two-Color Aware Support • RFC 2474: Definition of the Differentiated Services Field (DS field) in the IPv4 and IPv6 Headers • RFC 2475: An Architecture for Differentiated Services • RFC 2597: Assured Forwarding Per-Hop Behavior (PHB) Group • RFC 3246: An Expedited Forwarding PHB • RFC 3260: New Terminology and Clarifications for DiffServ • Class of Service (CoS) Queue Mapping Configuration <ul style="list-style-type: none"> • AutoVoIP: Automatic CoS Settings for VoIP • IP DSCP-to-Queue Mapping • Configurable Interface Trust Mode (IEEE 802.1p, DSCP, or Untrusted) • Interface Egress Shaping Rate • Strict Priority versus Weighted Scheduling per Queue
-----	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------